


How to setup voice mail for Phone extension

1. Click on the Setting icon

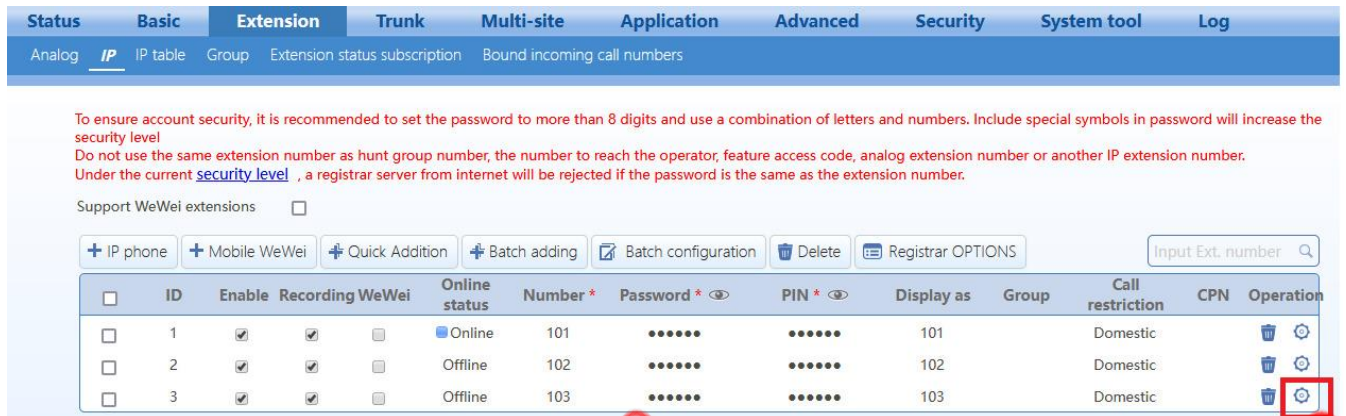


To ensure account security, it is recommended to set the password to more than 8 digits and use a combination of letters and numbers. Include special symbols in password will increase the security level
Do not use the same extension number as hunt group number, the number to reach the operator, feature access code, analog extension number or another IP extension number.
Under the current [security level](#), a registrar server from internet will be rejected if the password is the same as the extension number.

Support WeWei extensions

+ IP phone + Mobile WeWei + Quick Addition + Batch adding Batch configuration Delete Registrar OPTIONS Input Ext. number

<input type="checkbox"/>	ID	Enable	Recording WeWei	Online status	Number *	Password *	PIN *	Display as	Group	Call restriction	CPN	Operation
<input type="checkbox"/>	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Online	101	••••••	••••••	101		Domestic	
<input type="checkbox"/>	2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Offline	102	••••••	••••••	102		Domestic	
<input type="checkbox"/>	3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Offline	103	••••••	••••••	103		Domestic	

2. Select Call Forward No Answer to Voice Mail.

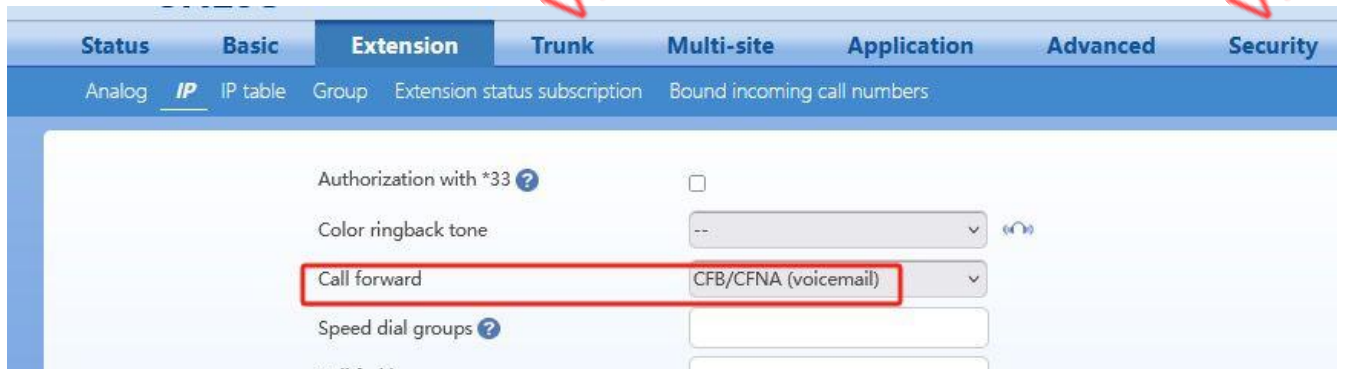


Authorization with *33

Color ringback tone

Call forward

Speed dial groups

3. From here, we can control the number of ring.

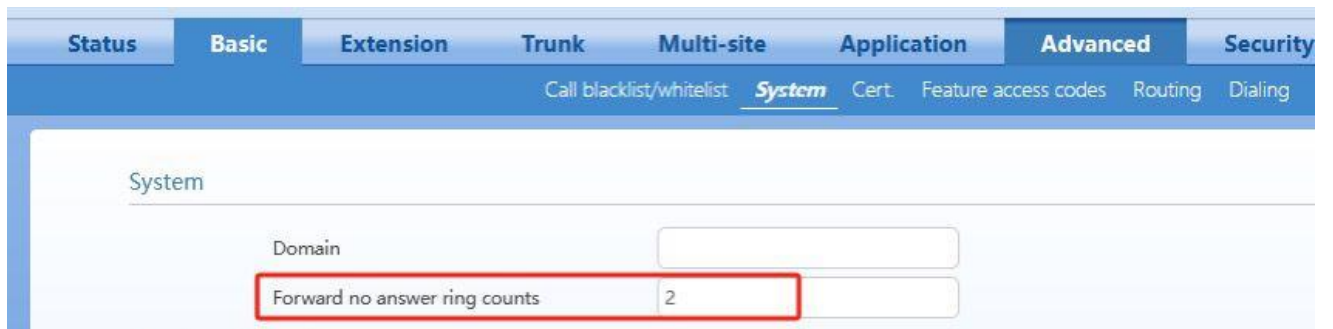

System

Domain

Forward no answer ring counts

VEID

VEID

VEID



VEID ENTERPRISES PTE LTD
642 Rowell Road #02-119,
Singapore 200642.

Tel: +65 6599 6805 Fax: +65 6251 1287
Email: sales@veid.net

4. Change to RFC 2833 and save.

Status	Basic	Extension	Trunk	Multi-site	Application	Advanced	Security	System tool	Log
Call blacklist/whitelist System Cert. Feature access codes Routing Dialing Tone SIP DTMF Call record									
Transmission method	RFC 2833								
RFC 2833 payload type	101	Range: 96 to 127, Default: 101 ?							
DTMF tone duration ?	100	ms (Range: 50 - 150, Default: 100)							
DTMF interdigit pause ?	100	ms (Range: 50 - 150, Default: 100)							
Min. DTMF detection duration ?	48	ms (The range must be 32 to 96 in multiples of 16)							
DTMF detection duration increment against talk-off	16	ms ?							
Save									

5. At IP phone, we need to change to RFC2833.

New Rock TECHNOLOGIES

NRP1202

- System
- Network
- Line**
- Phone settings

SIP SIP Hotspot Dial Plan Ba

Voice Message: 3600
 Subscribe Period: (60~999999)second(s)
 Hotline Delay: 0 (0~9)second(s)
 Dial Without Registered: ?
DTMF Type: RFC2833 ?
 Request With Port: ?
 Use STUN: ?

VEID

VEID

VEID

VEID

VEID

VEID